

Product datasheet

Specifications



Data socket, New Unica, RJ45 CAT 6 UTP, straight, click, shuttered, 2 module, white

NU341518

Main

Range	New Unica
Product or component type	Data socket
Device application	Communication
Device presentation	Mechanism
Colour tint	White (RAL 9003)
Data socket type	RJ45 8 contact(s) Cat.6 < 250 MHz
Provided equipment	Label holder Protective flap

Complementary

Communication network type	1000BASE-TX
Communication port protocol	ATM 1200 Mbps
Number of modules	2 modules
Socket number	1
Type of footprint	Infraplus
Connector type	S-One
Cable shielding type	U/UTP
Organization of wire	Unshielded twisted pair
Connections - terminals	Click
Device mounting	Flush
Fixing mode	Clip-in
Installation direction	Straight
Material	Thermoplastic ABS-UV stabilised: central plate
Quantity per set	1
Depth	40.5 mm
Width	45 mm
Height	45 mm
Embedding depth	40.5 mm

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

resistance to chemical agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %) Resistant to A-Lactic Acid Resistant to diluted quaternary ammonium Resistant to diluted bleach Resistant to diluted ammonia Resistant to soapy water Resistant to crystal cleaner Resistant to hydrogen peroxide 10 volumes Resistant to hexane
--------------------------------------	---

Environment

IP degree of protection	IP20
IK degree of protection	IK01
Ambient air temperature for operation	-25...55 °C
Ambient air temperature for storage	-5...35 °C

Packing Units

Unit Type of Package 1	PCE
-------------------------------	-----

Number of Units in Package 1	1
-------------------------------------	---

Package 1 Height	4 cm
-------------------------	------

Package 1 Width	4.5 cm
------------------------	--------

Package 1 Length	4.5 cm
-------------------------	--------

Package 1 Weight	17 g
-------------------------	------

Unit Type of Package 2	BB1
-------------------------------	-----

Number of Units in Package 2	10
-------------------------------------	----

Package 2 Height	5.5 cm
-------------------------	--------

Package 2 Width	14 cm
------------------------	-------

Package 2 Length	26 cm
-------------------------	-------

Package 2 Weight	170 g
-------------------------	-------

Unit Type of Package 3	S02
-------------------------------	-----

Number of Units in Package 3	50
-------------------------------------	----

Package 3 Height	15 cm
-------------------------	-------

Package 3 Width	30 cm
------------------------	-------

Package 3 Length	40 cm
-------------------------	-------

Package 3 Weight	1.169 kg
-------------------------	----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 1

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Average percentage of recycled plastic content 17 %

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant

SCIP Number 89f48f58-8743-4a8c-aad2-c796c3e70cb3

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture

Recyclability potential, in % 41



End of life manual availability [End of Life Information](#)

Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Wiring diagram

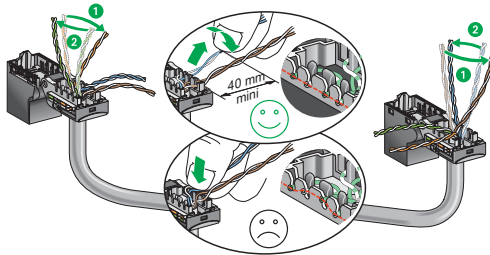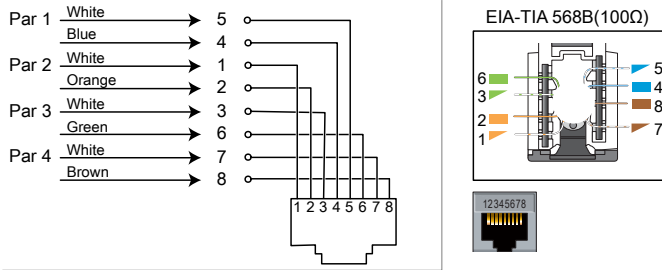

⚠️ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.