

Product datasheet

Specifications



Movement detector, New Unica, 10A, push button, white

NU352518

Main

Product brand	Schneider Electric
Range	New Unica
Type number	NH3525
Product or component type	Movement detector
Colour tint	White (RAL 9003)

Complementary

Device presentation	Mechanism
Device mounting	Flush
fixing mode	By screws
Sensor type	PIR
Load type	Incandescent lamp: 2200 W at 230 V AC Halogen lamp: 2000 W at 230 V AC LED lamp: 0...130 W at 230 V AC Motor (single-phase): 1000 VA at 230 V AC LV halogen lamps: 1050 VA at 12 V AC (electronic transformer) LV halogen lamps: 500 VA at 12 V AC (wound transformer)
[Ue] rated operational voltage	230 V AC 50 Hz
Rated current	10 A 140 μ F 10 A cos phi = 0.6
Associated fuse rating	16 A
Main colour tint	White
Surface finish	Glossy
Number of modules	2 modules
Number of FUNCTION keys	1
Local signalling	Status: 1 LED (red)
Detection angle	160° horizontal
Detection face	Frontal: 8 m Lateral: 8 m
Number of outputs	1
Control type	Manual control Local control automatic load detection Remote control by auxiliary push-button
Light intensity adjustment	5...500 lux
Time delay range	1...30 min
Connected auxiliaries	Unlimited number of push-buttons, distance : 50 m

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Provided equipment	User manual
Wiring configuration	With neutral
Connections - terminals	Screw terminal
Number of loop terminals	2
Clamping connection capacity	1.5...2.5 mm ² for solid cable(s) 1.5...2.5 mm ² for solid stranded cable(s)
shape of screw head	Pozidriv No 1 and combi
tightening torque	0.5 N.m
Material	PC (polycarbonate) GF10 FR: casing Metal: terminals Thermoplastic ABS-UV stabilised: central plate
Mounting support	Wall
Type of installation	Indoor installation
Quantity per set	1
Type of packing	Carton
Mounting height	1 m
Embedding depth	29 mm
Depth	44 mm
Width	45 mm
Height	45 mm
Net weight	0.042 kg
Standards	EN 301-489-17 EN 60669-2-1 EN 300-328 EN 60730-2-7
Directives	2014/30/EU - electromagnetic compatibility 2014/35/EU - low voltage directive
Product certifications	VDE NEMKO CE EAC SEMKO FIMKO
resistance to chemical agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %) Resistant to A-Lactic Acid Resistant to diluted quaternary ammonium Resistant to diluted bleach Resistant to diluted ammonia Resistant to soapy water Resistant to crystal cleaner Resistant to hydrogen peroxide 10 volumes Resistant to hexane

Environment

Ambient air temperature for operation	5...40 °C
Ambient air temperature for storage	5...40 °C
IP degree of protection	IP20 IP21 with marking on visual parts
IK degree of protection	IK04

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.000 cm
Package 1 Width	9.500 cm
Package 1 Length	9.500 cm
Package 1 Weight	105.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	9
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	1.242 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant with Exemptions

SCIP Number

C353e457-a642-494f-af4d-b63ab65f1906

REACH Regulation

[REACH Declaration](#)

Use Again

Repack and remanufacture


End of life manual availability

[End of Life Information](#)

Take-back


No

WEEE Label

 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Wiring diagram

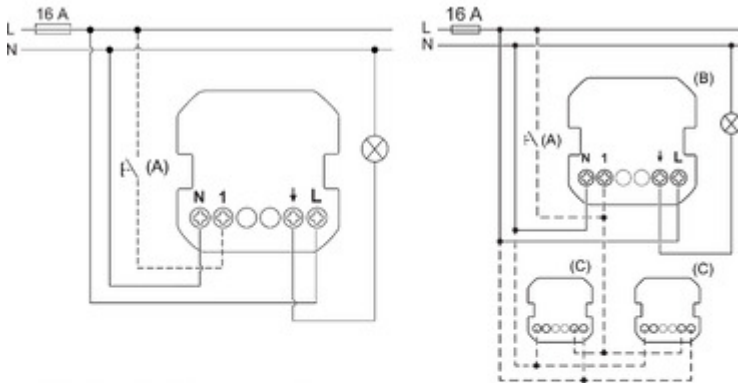

- (A) Mechanical push-button (optional)
- (B) Primary motion sensor
- (C) Secondary motion sensor

⚠ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH
The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Offer Marketing Illustration

Product benefits / Features

Technical Benefits
New Unica

