



LED Bollard Performer


Features

- Wide applicable voltage
- Flicker Free, anti-glare
- Easy Installation

Benefits

- Safe for outdoor use, weather resistant
- Long life up to 30000h
- Soft light, Comfortable vision

Application



Specification


Item Code	Item Description	Power (W)	Power Factor	Lumen (lm)	Input Current (mA)	Lifetime (L70B50)	MOQ (pcs)
703000000310	LED Bollard-P H600 15W 3000-BK-GP	15	0.9	900	73	30000	200
703000000210	LED Bollard-P H600 15W 5700-BK-GP	15	0.9	900	73	30000	200

Technical Specifications	
CRI	≥80
Colour Consistency (SDCM)	6
Dimmable	No
Housing Colour	Black
IP	IP65
Driver integrated (Yes/No)	Yes
Glow wire test	650°C
Weight (kg/pc)	1.67

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

Mechanical Properties	
Housing Material	Aluminium
Optical Material	PC


Application Conditions	
Operating Temperature	-30-50°C
Application Temperature	25°C
Storage Environment	-30-65°C



Packaging Information


Item		Single Box(1pc/box)		Packaging Unit		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
703000000310	LED Bollard-P H600 15W 3000-BK-GP	235*235*640	2.25	655*490*250	4.5	2
703000000210	LED Bollard-P H600 15W 5700-BK-GP	235*235*640	2.25	655*490*250	4.5	2

Dimensional Drawing

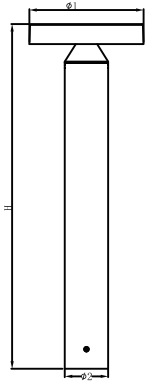

Model	Φ1(mm)	Φ2(mm)	H(mm)
LED OB-P 15W	200	60	600

Photometric Data



90D

OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China
ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com

WWW.OPPLE.COM/EN