



MASTER VALUE LED spot MV

Master LED 4.9-50W GU10 930 36D Dim

LEDspot, PAR16, 50 W, GU10, 3000 K, 405 lm, 25000 hour(s)

LEDspot, PAR16, 50 W, GU10, 3000 K, 405 lm, 25000 hour(s), 81.00 lm/W

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data


General Information			
Cap-Base	GU10	Color rendering index (CRI)	90
Nominal lifetime	25,000 hour(s)	LLMF At End Of Nominal Lifetime (Nom)	70 %
Switching Cycle	50,000	Luminous Flux in 90° Cone (Rated)	365 lm
Lighting Technology	LEDspot		
Light Technical		Operating and Electrical	
Color Code	930 [CCT of 3000K]	Line Frequency	50 to 60 Hz
Beam Angle (Nom)	36 degree(s)	Input Frequency	50 to 60 Hz
Luminous Flux	405 lm	Power Consumption	5 W
Luminous Intensity (Nom)	650 cd	Lamp Current (Nom)	27 mA
Color Designation	White (WH)	Wattage Equivalent	50 W
Correlated Color Temperature (Nom)	3000 K	Starting Time (Nom)	0.5 s
Luminous Efficacy (rated) (Nom)	81.00 lm/W	Warm-up time to 60% light	0.5 s
Color Consistency	<6	Power Factor (Fraction)	0.8
		Voltage (Nom)	220-240 V

MASTER VALUE LED spot MV

Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	PAR16
Net Weight (Piece)	0.038 kg
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	5 kWh
EU RoHS compliant	Yes
Ambient temperature range	-20 °C to 45 °C


Application Conditions	
Wireless Technology	Not applicable
Product Data	
Order product name	Master LED 4.9-50W GU10 930 36D Dim
Full product name	Master LED 4.9-50W GU10 930 36D Dim
Full product code	871869675592100
Order code	929001348908
Material Nr. (12NC)	929001348908
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696755921
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696755938

Dimensional drawing




Product	D	C
Master LED 4.9-50W GU10 930 36D Dim	50 mm	54 mm

Photometric data



Accent Lighting - Spot

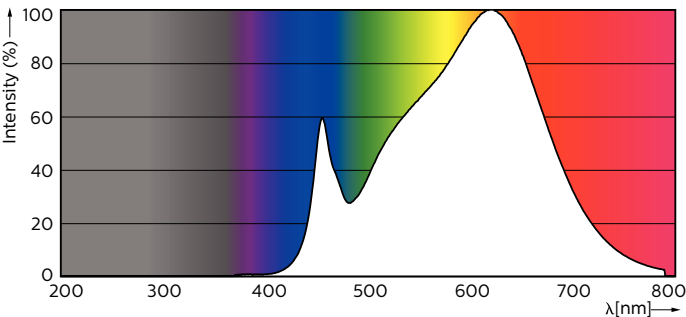


Accent Lighting Spots - Master LED 4.9-50W GU10 930 36D Dim

Spectral Power Distribution Colour - Master LED 4.9-50W GU10 930 36D Dim


MASTER VALUE LED spot MV

Photometric data




Light Distribution Diagram - Master LED 4.9-50W GU10 930 36D Dim

Lifetime

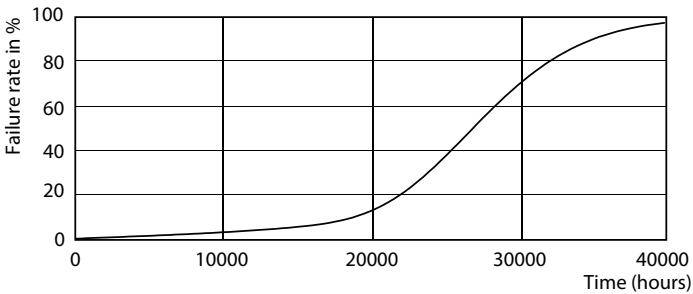

25K LED

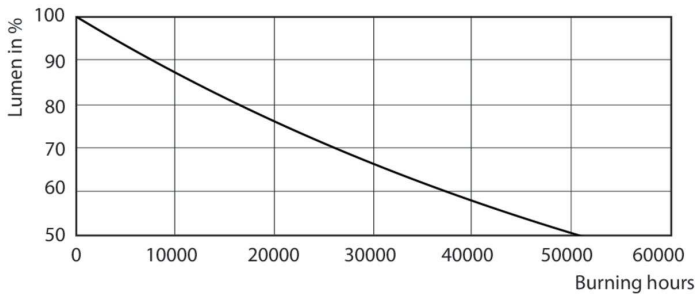

Lumen Maintenance Diagram - Master LED 4.9-50W GU10 930 36D Dim

